



## AXi 41xx

Specification	AXI4120/14	AXI4120/18	AXI4120/20	AXI4130/16	AXI4130/20
Voltage range	max 5s Li-Poly	max 6s Li-Poly	max 6s Li-Poly	max 8s Li-Poly	max 8s Li-Poly
RPM per Volt	660 RPM/V	515 RPM/V	465 RPM/V	385 RPM/V	305 RPM/V
Max. Efficiency	85%	86%	87%	88%	88%
Max. Efficiency Current	20-40 A (<82%)	15-40 A (<82%)	13-37 A (<82%)	18-40 A (<82%)	18-40 A (<84%)
No load current	2A	1,5A	1,5A	1,3A	1,2A
Max. Loading	55 A/60 s	55 A/60 s	52 A/60 s	60 A/60 s	85 A/10 s
Internal resistance	41mΩ	70mΩ	82mΩ	63mΩ	99mΩ
Dimensions	50x54,4 mm	50x54,4 mm	50x54,4 mm	50x64,4 mm	50x64,4 mm
Shaft Diameter	6 mm				
Weight	315 g	315 g	315 g	410 g	410 g
Recomended model weight	3500-7000g	3500-7000g	3500-7000g	3500-7000g	3500-7000g

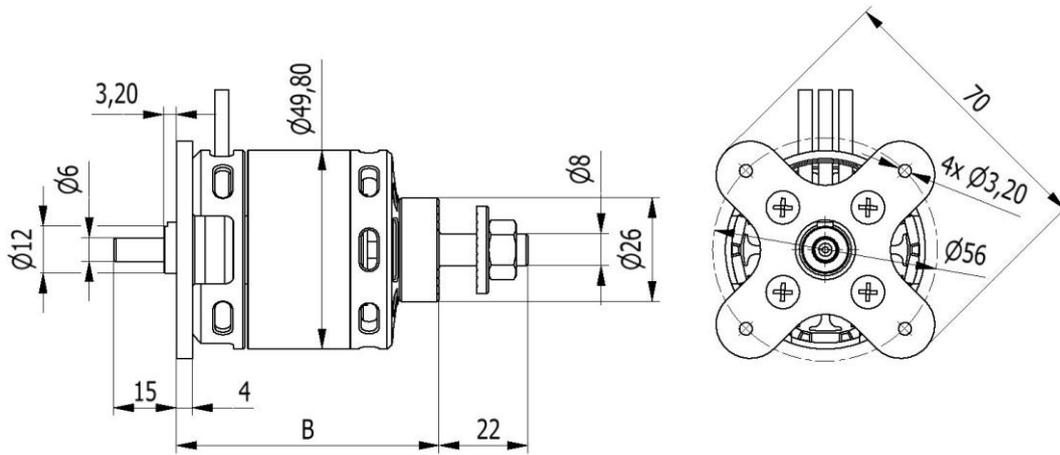

AXI-41xx	B (mm)
AXI-4120	65,4
AXI-4130	75,4

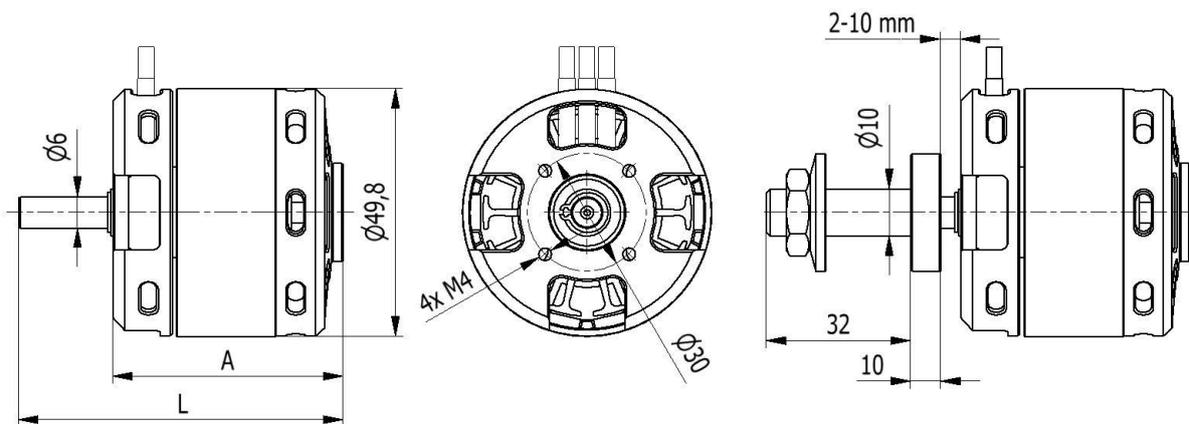

AXI-41xx	A (mm)	L (mm)
AXI-4120	54,4	74
AXI-4130	64,4	84